

# 美格智能 SRM813Q模组

MiniPCle

SRM8

1eMBB

5G RedCap

MeiG Smart Confidential



5G RedCap

MiniPCle

PIN




\*R

5G LAN

56#



5G NR



SA & LTE



MiniPCle



USB2.0 Port



-40 -85



VoNR/VoLTE\*

# MeiG Smart SRM813Q模组

5G RedCap

MiniPCIe

MEIG 美格

股票代码: 002881

- MiniPCIe
- 50.95x30.0x3.45mm
- <10g

- 5G NR SA:
  - Downlink up to 220Mbps
  - Uplink up to 120Mbps

- LTE:
  - Downlink up to 200Mbps
  - Uplink up to 75Mbps


- Windows 7, Windows 8, Windows 8.1, Windows 10, Linux, Android

USB FOTA

- RNDIS/NDIS/IPv4/IPv6/TCP/UDP

- USB2.0 x 1
- PCM x 1
- UART x 1
- GPIOs x 1
- USIM 1.8V/3V
- 3
- 4G/5G x 2
- GNSS x 1

- CCC\*/SRRC\*/CTA\*/CE\*/FCC\*

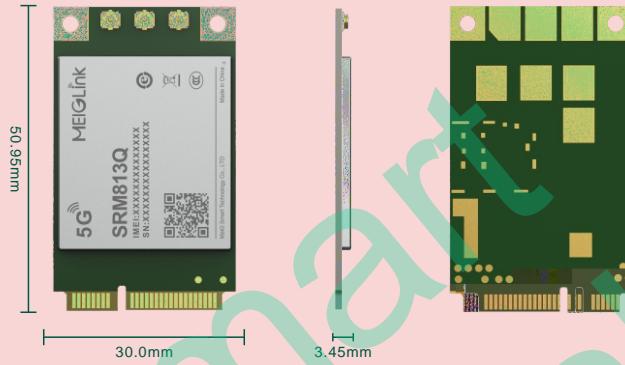

- Class 3 (23dBm±1.5dB) for 5G & LTE

- 30°C to +75°C
- 40°C to +85°C
- 40°C to +90°C
- 5%~95%

## SRM813Q MiniPCIe

-CN:Region: China

5G NR:

FDD:N1/N5/N8/N28

TDD:N41/78

LTE:

FDD:B1/B3/B5/B8

TDD:B34/B38/B39/B40/B41

-NA:Region:North America

5G NR:

FDD:N2/N5/N7/N12/N13/N25/N66/N71

TDD:N38/N41/N48/N77/N78

LTE:

FDD:B2/B4/B5/B7/B12/B13/B17/B25/B26/B66/B71

TDD:B38/B41/B42/B43/B48

-EA:Region:Europe, Australia, Japan, Korea, Southeast Asia

5G NR:

FDD:N1/N3/N5/N7/N8/N20/N28

TDD:N38/N40/N41/N77/N78

LTE:

FDD:B1/B3/B5/B7/B8/B20/B28

TDD:B38/B40/B41/B42/B43

\* 研发中

